



IECEX



SIL 2



Global certification available

Online
Inquiry >

Earth-Rite® II PLUS

Static Grounding Indicator and Interlock System



Earth-Rite II PLUS Static Grounding System



Medium and Large Heavy Duty Clamp/s

with Quick Connect and optional lengths of Hytrel coated 2 core cable included

Precision and reliability of the Earth-Rite® II PLUS provides QHSE professionals and engineers who are tasked with protecting personnel and plant assets from the ignition hazards of static electricity during railcar, skid, and IBC loading/unloading operations.

Conductive metal objects like railcars, LACT units, skids and IBCs that contain electrostatically charged liquids can accumulate hazardous levels of electrostatic charge if they are not grounded.

This hazardous level of electrostatic charge can spark to other objects close by and is in excess of the minimum ignition energy of combustible gases and vapours present.

The ignition of combustible atmospheres by static electricity can be mitigated by ensuring that such objects are grounded.

The Earth-Rite II PLUS is the ideal solution for grounding and bonding a broad range of equipment at risk of igniting combustible gases and vapours.

The Earth-Rite II PLUS ensures that a continuously monitored 10 Ohm, or less, connection is present between the grounded object and a designated true earth grounding point. This feature provides equipment specifiers with the ability to demonstrate compliance with the grounding and bonding recommendations of IEC TS 60079-32*, NFPA 77* and API RP 2003*.

*IEC TS 60079-32, "Explosive atmospheres: electrostatic hazards, guidance."

*NFPA 77, "Recommended Practice on Static Electricity."

*API RP 2003, "Protection Against Ignitions Arising Out of Static, Lightning, and Stray Currents."

* Always check for and read the latest version of the International Standards, Guidance and/or Recommended Practices.


The Earth-Rite II PLUS includes:

- XP / Ex(d) Controller with Intrinsically Safe Monitoring Circuit or
- HAZLOC approved static dissipative GRP controller with Intrinsically Safe Monitoring Circuit
- Ground Connection Junction Box with Clamp Stowage Point and Quick Release Connector
- Universal Grounding Clamp with various lengths of 2 conductor Cen-Stat protected Cable
- Flexible HAZLOC installation options

Earth-Rite® II PLUS

Static Grounding Indicator and Interlock System

Earth-Rite® II PLUS

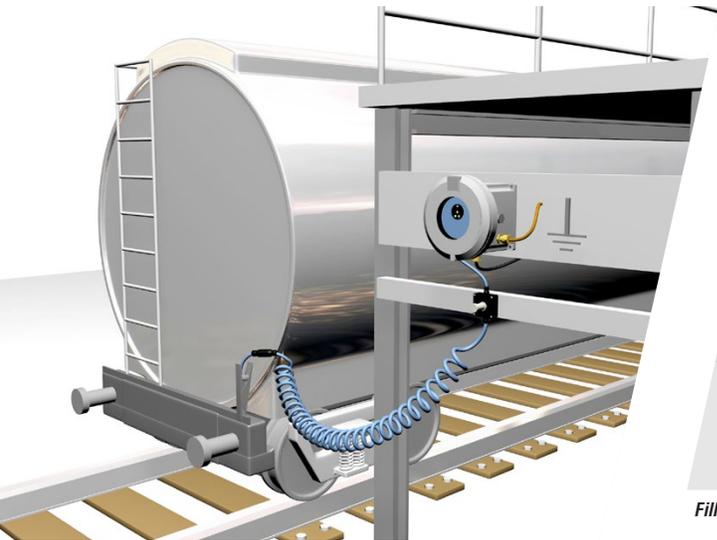

Filling IBCs, Totes, Drums, Containers and Rail Cars

Features and Benefits

Attention grabbing high intensity LEDs

Three green LEDs continuously pulse informing operators that the object to be protected from static discharges is grounded. The red LED will illuminate continuously when the system is not in use, or when it detects the resistance in the static grounding loop is higher than 10 Ohms*.

Continuous Ground Loop Monitoring

Monitors the resistance of the ground loop from the grounded object through to the site's verified true earth grounding point. If the Earth-Rite® II PLUS detects that resistance in the ground loop is higher than 10 Ohms, it engages a pair of volt free changeover contacts that can be interlocked with the control and/or product transfer system to turn them ON or OFF.

Two dry output contacts

The primary contact can be interlocked with electro-mechanical devices or PLC systems to shut down the flow of product. The secondary contact can interface with attention grabbing audible alarms or strobe lights to provide an extra layer of protection over the hazard.

Easy Installation

Simple wall mounted enclosures complemented by straightforward cabling and PCB system wiring requirements. Flexible hazardous location enclosure options and power supplies which can run off both 115 V / 230 V AC and 12 V / 24 V DC.

* The international recommended practice for controlling the ignition hazards of static electricity in HAZLOC atmospheres, IEC TS 60079-32 and NFPA 77, recommend that the maximum resistance between conductive metal plant equipment and verified true earth earthing points should not be more than 10 Ohms resistance.



Designed for grounding drums and small containers



Designed for grounding large drums and large containers

Earth-Rite® II PLUS

Static Grounding Indicator and Interlock System

Earth-Rite® II PLUS

Technical Specification

XP (Class I, II, III - Div 1 Installations)

Monitoring Unit

Power Supply	115 V or 230 V AC, 50-60 Hz 12 V or 24 V DC
Power Rating	10 watt
Ambient Temperature Range	-40°F to +122°F (-40°C to +55°C)
Ingress Protection	Type 4X (IP 66)
Weight	9.9 lbs (4.5 kg) nett
Construction	Copper-free cast aluminium
Monitoring Circuit	Intrinsically safe
Monitoring Loop Resistance	Nominally ≤ 10 Ohm ($\pm 10\%$)
Output Relay Contact Rating	2 off dry contacts 250 V AC 5 A 500 VA max resistive 30 V DC 2 A 60 W max resistive
Cable Entries	7 x $\frac{3}{4}$ " NPT (supplied with 4 stopper plugs)

Junction Box/Stowage Point



Enclosure Material	GRP with carbon loading
Terminals	2 x AWG #14 conductor capacity
Stowage Device	Insulated universal stowage pin
Cable Entries	1 x M20
Clamp Cable Connection	Quick Connect

Grounding Clamp


Clamp Design	2 pole with tungsten carbide teeth
Body	Stainless Steel (SS grade: 304)
ATEX / FM / IECEx Certification:	Ex II 1 GD T6 (Assessed to EN 13463-1 : 2009) ATEX certificate number: Sira 02ATEX9381 FM Certificate of Compliance number: 3046346 IECEX Ex h IIC T6 Ga Ex h IIIC T85°C Da Ta = -40°C to +60°C IECEX EXV 20.0033

Spiral Cable

Cable	Blue Cen-Stat Hytrel sheath (Static dissipative, chemical & abrasion resistant)
Conductors	2 x AWG #18 copper
Length	3 m (10 ft), 5 m (16 ft), 10 m (32 ft) or 15 m (50 ft) 2 pole Cen-Stat blue spiral cable with Hytrel coating which has colour, UV protective and static dissipative additives

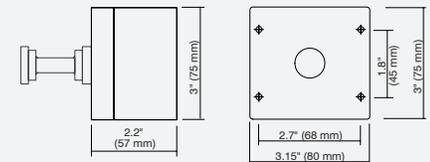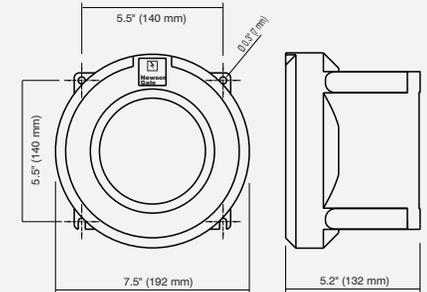

Simple Apparatus
GRP junction box with nylon grounding clamp stowage pin

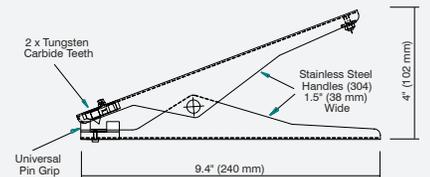

Static Grounding Clamp
Dual core stainless steel grounding clamp fitted with one pair of tungsten carbide tips

Earth-Rite® II PLUS

Hazardous Location Approvals

North America:

Europe / International Version Available:

NEC 500 / CEC (Class & Division)

Associated Equipment [Ex ia] for use in
 Class I, Div. 1, Groups A, B, C, D
 Class II, Div. 1, Groups E, F, G
 Class III, Div. 1

Providing intrinsically safe circuits for
 Class I, Div. 1, Groups A, B, C, D
 Class II, Div. 1, Groups E, F, G
 Class III, Div. 1

When installed per Control Dwg;
 ER11-Q-101110 cCSAus
 Ta = -40°C to +50°C (-40°F to +122°F)

OSHA recognised NRTL: CSA

NEC 505 & 506 (Class & Zoning)

Class I, Zone 1 [0] AEx d[ia] IIC T6 Gb(Ga)
 (gas & vapour)
 Class II, Zone 21 [20] AEx tD [iaD] 21
 T80°C (combustible dusts)

CEC Section 18 (Class & Zoning)

Class I, Zone 1 [0] Ex d[ia] IIC T6 Gb(Ga)
 DIP A21, IP66, T80°C

IECEx

Ex d[ia] IIC T6 Gb(Ga) (gas & vapour)
 Ex tb IIIC T80°C IP66 Db
 (combustible dusts)
 Ta = -40°C to +55°C
 IECEx EXV 19.0052
 IECEx Certifying Body: ExVeritas

ATEX

⊕ II 2(1)GD
 Ex d[ia] IIC T6 Gb(Ga)
 Ex tb IIIC T80°C IP66 Db
 Ta = -40°C to +55°C
 ExVeritas 19ATEX0537
 ATEX Notified Body: ExVeritas

Additional Certification

Safety Integrity Level:

SIL 2 (in accordance with IEC/EN 61508)

EMC Tested:

to EN 61000-6-3, EN 61000-6-2
 FCC - Part 15 (Class B)

Earth-Rite® II PLUS

Static Grounding Indicator and Interlock System

Earth-Rite® II PLUS

Technical Specification

for single unit installation in Div.2 hazardous locations

Power Supply & Monitoring-Unit

Power Supply	115 V or 230 V AC, 50-60 Hz 12 V or 24 V DC
Power Rating	10 watt
Ambient Temperature Range	-13°F to +131°F (-25°C to +55°C)
Ingress Protection	Type 4X (IP 66)
Weight	4.4 lbs (2 Kg) nett
Construction	Carbon-loaded GRP
Monitoring Circuit	Intrinsically safe
Monitoring Loop Resistance	Nominally ≤ 10 Ohm ($\pm 10\%$)
Output Relay Contact Rating	2 off dry contacts 250 V AC 5 A 500 VA max resistive 30 V DC 2 A 60 W max resistive
Cable Entries	7 x M20 (2 x plugged)

Junction Box/Stowage Point



Enclosure Material	GRP with carbon loading
Terminals	2 x AWG #14 conductor capacity
Stowage Device	Insulated universal stowage pin
Cable Entries	1 x M20
Clamp Cable Connection	Quick Connect

Grounding Clamp


Clamp Design	2 pole with tungsten carbide teeth
Body	Stainless Steel (SS grade: 304)
ATEX / FM / IECEx Certification:	Ex II 1 GD T6 (Assessed to EN 13463-1 : 2009) ATEX certificate number: Sira 02ATEX9381 FM Certificate of Compliance number: 3046346 IECEX Ex h IIC T6 Ga Ex h IIC T85°C Da Ta = -40°C to +60°C IECEX EXV 20.0033

Spiral Cable


Cable	Blue Cen-Stat Hytel sheath (Static dissipative, chemical & abrasion resistant)
Conductors	2 x AWG #18 copper
Length	3 m (10 ft), 5 m (16 ft), 10 m (32 ft) or 15 m (50 ft) 2 pole Cen-Stat blue spiral cable with Hytel coating which has colour, UV protective and static dissipative additives

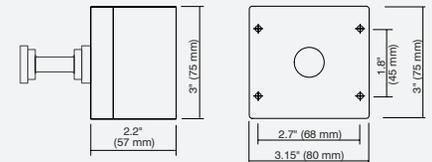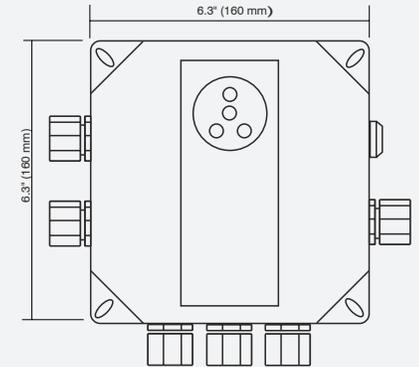

Simple Apparatus
GRP junction box with nylon grounding clamp stowage pin

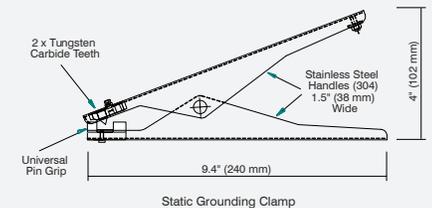

Static Grounding Clamp

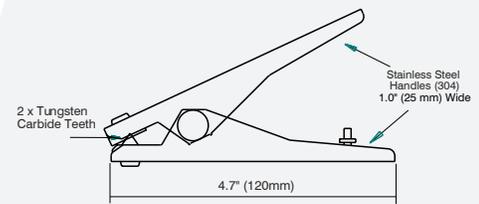

Static Grounding Clamp

Dual core stainless steel grounding clamp fitted with one pair of tungsten carbide tips

Earth-Rite® II PLUS

Hazardous Location Approvals

North America:

Europe / International Version Available:

NEC 500 / CEC (Class & Division)

Associated Equipment [Ex ia] for use in
 Class I, Div. 2, Groups A, B, C, D
 Class II, Div. 2, Groups E, F, G
 Class III, Div. 2

Providing Intrinsically Safe circuits for
 Class I, Div. 1, Groups A, B, C, D
 Class II, Div. 1, Groups E, F, G
 Class III, Div. 1

When installed per Control Dwg;
 ERII-Q-10165 cCSAus
 Ta = -25°C to +55°C (-13°F to +131°F)

OSHA recognised NRTL: CSA

NEC 505 & 506 (Class & Zoning)

Class I, Zone 2, (Zone 0), AEx nA[ia] IIC T4
 (gas & vapour)
 Class II, Zone 21, AEx tD[iaD] 21, T70°C
 (combustible dusts)

CEC Section 18 (Class & Zoning)

Class I, Zone 2 (Zone 0) Ex nA[ia] IIC T4
 DIP A21, IP66, T70°C

IECEx

Ex ec nC [ia] IIC T4 Gc(Ga)
 (gas & vapour)

Ex tb IIIC T70°C Db
 (combustible dusts)

Ta = -40°C to +55°C

IECEx EXV 19.0059X

IECEx Certifying Body: ExVeritas

ATEX

⊕ II 3(1) G

Ex II 2D

Ex ec nC [ia] IIC T4 Gc(Ga)

Ex tb IIIC T70°C Db

Ta = -40°C to +55°C

ExVeritas 19ATEX0545X

ATEX Notified Body: ExVeritas

Additional Certification

Safety Integrity Level:

SIL 2 (in accordance with IEC/EN 61508)

EMC Tested:

to EN 61000-6-3, EN 61000-6-2
 FCC - Part 15 (Class B)

Earth-Rite® II PLUS

Static Grounding Indicator and Interlock System

Earth-Rite® II PLUS

Technical Specification

for ground monitor-indicator station mounted in Div.1 locations and power supply for mounting in Div.2 or non-hazardous locations.

for Class 1, Div.1 locations (or lower)

Ground Monitor Indicator

U.S. / Canada Class and Division system:

Intrinsically Safe Equipment Exia for use in
Class I, Div. 1, Groups A, B, C, D;
Class II, Div. 1, Groups E, F, G;
Class III, Div. 1,
when installed per Control Dwg. ERII-Q-10173 cCSAus

Canada Class and Zone system:

Class I, Zone 0, Ex ia IIC T4
DIP A20 T70C

U.S. Class and Zone system:

Class I, Zone 0 AEx ia IIC T4
Class II, Zone 20, AEx iaD 20 T70C
T4 @ Ta = -25°C to +55°C
Enclosure Type 4X, IP 66. Static dissipative GRP

for mounting in Div.2 or Non-Hazardous locations

Power Supply Unit

Power Supply

115 V or 230 V AC, 50-60Hz

U.S. / Canada Class and Division system:

Associated Equipment [Exia] for use in
Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups E, F, G;
Class III, Div. 2,
providing Intrinsically Safe circuits for
Class I, Div. 1, Groups A, B, C, D;
Class II, Div. 1, Groups E, F, G;
Class III, Div. 1,
when installed per Control Dwg. ERII-Q-10173 cCSAus

Canada Class and Zone system:


Class I, Zone 2 (zone 0), Ex nA[ia] IIC T4
DIP A21 T70C

U.S. Class and Zone system:


Class I, Zone 2 (zone 0) AEx nA[ia] IIC T4
Class II, Zone 21, AEx tD[iaD] 21 T70C
T4 @ Ta = -25°C to +55°C
Enclosure Type 4X, IP 66. Static dissipative GRP

Output Relay Contact Rating:

2 off dry contacts,
250 V AC, 5A, 500VA max resistive
30 V DC, 2A, 60W max resistive

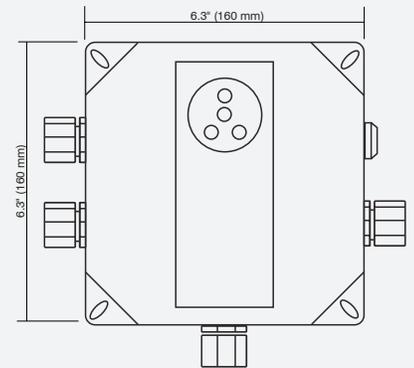

Earth-Rite II PLUS ground status indicator station
for Class 1, Div.1 locations (or lower)

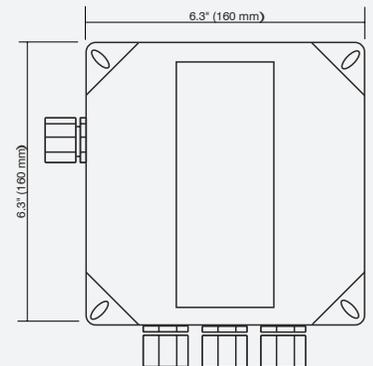

Earth-Rite II PLUS 240 V / 110 V AC power supply
for mounting in Div.2 or Non-Hazardous locations

Earth-Rite® II PLUS

Static Grounding Indicator and Interlock System

System Options

Universal Resistance Tester (URT)

The URT is designed to provide users of Newson Gale **Earth-Rite®** static grounding systems with a means of testing the permissive resistance range on a regular basis.

The easy to use tester consists of a pair of rotary switches that enable a competent electrical person to check the resistance level at which the grounding system should be working and conduct a PASS / FAIL test at the required setting.



Retractable Cable Reel

The Retractable Cable Reel is supplied for grounding system installations where customers want to ensure the grounding clamp and cable are returned to the static grounding system by operators and drivers on completion of the product transfer process. The reel can be used in conjunction with the **Earth-Rite II PLUS**.

- Certified for Div. 1 and 2 hazardous areas
- Self-retracting with up to 50 ft (15 m) of Hytrel® protected cable.
- Silver plated ultra low resistance slip ring contacts.
- ATEX -  II 2 GD T6



Sun Shield

Designed for operating environments subject to intense sunlight, the ER II Sun Shield protects against direct sunlight hitting the indicators on the **Earth-Rite II PLUS** static grounding systems.

The Sun Shield casts a shadow over the indicators during peak sun light hours so that operators can easily view the ground status indicators. The shield is constructed from stainless steel and can be fitted to any installation in a matter of minutes.



System Options

Intrinsically Safe (I.S) Switching PCB

The I.S Switching PCB is an additional circuit board added to Newson Gale system enclosures to enable users to directly interface with, and switch intrinsically safe circuits without the need for additional equipment. The I.S Switching PCB is designed not to affect the I.S signals electrical parameters and is compatible with the **Earth-Rite II PLUS**.

- 30 V DC, 500 mA
- Li = 0H, Ci = 0F
- Suitable for Ex ia, ib, ic rated intrinsically safe circuits only
- NAMUR Compatible



Ex Strobe Light

The strobe light is mounted in an elevated position and when the equipment is correctly grounded, flashes continuously informing personnel that a transfer process is underway and is protected from the static hazard. The strobe light can be used in conjunction with the **Earth-Rite II PLUS**.

- ATEX and Class/Div approved versions
- 115 V / 230 V AC and 24 V / 48 V DC options
- Amber, Green & Red strobe colour options



Earth-Rite® II PLUS

Static Grounding Indicator and Interlock System

System Options

2-Pole Surface Mountable connector

With this assembly operators tasked with earthing mobile process equipment will have a dedicated earthing point to attach the easy to use screw thread connector. The 'plug and play' connector can interface with all Newson Gale 2 core systems to provide earth monitoring capability on a wide range of mobile processes and equipment where generic earthing clamps cannot be used.

The conical shape design aids in the reduction of powder deposit build up over time and aids in clean down operations.

- Made using Stainless Steel (SS grade: 304) with Viton O-Rings
- IP 66
- -40°F to 140°F (-40°C to 60°C)
- Various lengths of straight or spiral Hytrel cable available
- IECEx Ex h Certification:
 - Ex h IIC T6 Ga
 - Ex h IIIC T85°C Da
 - Ta = -40°C to +60°C
 - IECEx EXV 20.0033



Copyright Notice

The website and its content is copyright of Newson Gale Ltd © 2020. All rights reserved.

Any redistribution or reproduction of part or all of the contents in any form is prohibited other than the following:

- you may print or download to a local hard disk extracts for your personal and noncommercial use only
- you may copy the content to individual third parties for their personal use, but only if you acknowledge the website as the source of the material

You may not, except with our express written permission, distribute or commercially exploit the content. Nor may you transmit it or store it in any other website or other form of electronic retrieval system.

Right to change

This document provides general information only and may be subject to change at any time without notice. All information, representations, links or other messages may be changed by Newson Gale at any time without prior notice or explanation.

Newson Gale is not obliged to remove any outdated information from its content or to expressly mark it as being outdated. Please seek the advice of professionals as necessary regarding the evaluation of any content.

Disclaimer of liability

The information provided in this Datasheet is provided by Newson Gale without any representations or warranties, expressed or implied, as to its accuracy or completeness. The liability of Newson Gale for any expenses, losses or actions incurred whatsoever by the recipient as a result of the use of this Datasheet shall be excluded.

Leading the way in hazardous area static control



www.newson-gale.com

1010

United Kingdom
Newson Gale Ltd
Omega House
Private Road 8
Colwick, Nottingham
NG4 2JX, UK
+44 (0)115 940 7500
groundit@newson-gale.co.uk

United States
IEP Technologies LLC
417-1 South Street
Marlborough, MA 01752
USA
+1 732 961 7610
groundit@newson-gale.com

Deutschland
IEP Technologies GmbH
Kaiserswerther Str. 85C
40878 Ratingen
Germany
+49 (0)2102 58890
erdung@newson-gale.de