

Limit Switch Box YT-870, YT-875

Product Number: YT-870, YT-875 (specify your requirement)

| Model | Switching Type | Connection Type * | Bracket Type | Option |
|--------|--|--|---|---|
| YT-870 | M Mechanical Type (2 x SPDT) | 1 NPT3/4 | 1 ST-1 (30*80, H20) | 0 NONE |
| YT-875 | P Proximity Type | 2 PF3/4 | 2 ST-2 (30*80, H30) | 1 +SPTM |
| | D Mechanical Type (2 x DPDT) | 3 M20 | 3 ST-3 (30*130, H30) | |
| | | 4 NPT1/2 | 4 ST-4 (30*130, H50) | |

*YT-875 NPT3/4 ONLY




YT-870



YT-875

| Item · Type | YT-870M YT-875M | YT-870P YT-875P | YT-870D YT-875D |
|----------------------|---|---|--------------------------------|
| Switch Type | Mechanical Switch x 2 | Proximity Sensor x 2 | Mechanical Switch x 2 |
| Switch Rating | AC: 250V 3A, 125V 5A DC: 250V 0.2A, 125V 0.4A, 30V 4A | 12-24V DC (Autonics) (Operating Voltage: 10-30V DC) P&F Type : 8V DC (Option) | AC: 125 or 250V 10A 480V 2A |
| Enclosure Protection | IP67 | | |
| Explosion Proof | Ex d IIC T6 | | |
| Ambient Temp. | -20°C~60°C | | |
| Conduit Entry | NPT3/4 (PF3/4, M20) | | |
| Terminal | 8 Points | | |
| Mouting Bracket | NAMUR VDI / VDE 3845, ISO 5211 | | |
| Material | YT-870 | Aluminum Diecasting | |
| | YT-875 | Stainless Steel 316 | |
| Weight | YT-870 | 1.5kg (3.3lb) | |
| | YT-875 | 3.5kg (7.7lb) | |

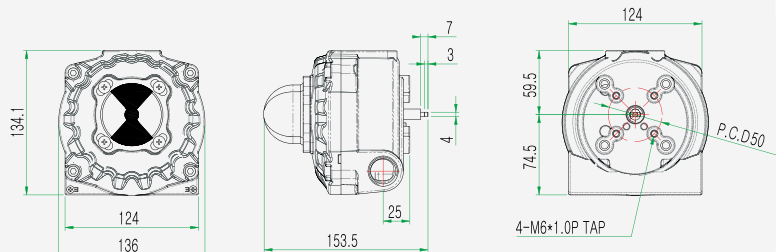

- Visual position indicator
- 8 contacts of terminal ports.
- Compatibility with any rotary motion actuator <ISO5211>
- Easy adjustment of cam position
- Dual 1/2" conduit entries.