


# Rosemount™ 975HR

## Multi-spectrum Infrared Hydrogen Flame Detector

The Rosemount™ 975HR Multi-spectrum Infrared Hydrogen Flame Detector is specifically designed for detection of hydrocarbon and hydrogen flames. It detects hydrocarbon-based fuel and gas fires at long distances with the highest immunity to false alarms. The Rosemount 975HR can detect a gasoline pan fire at 65 m (215 ft) or a hydrogen flame at 38 m (125 ft) in less than five seconds.

The Rosemount 975HR is the most durable and weather resistant flame detector on the market. Its features include a heated window to eliminate condensation and icing, HART®, lower power requirements and a compact lighter design.

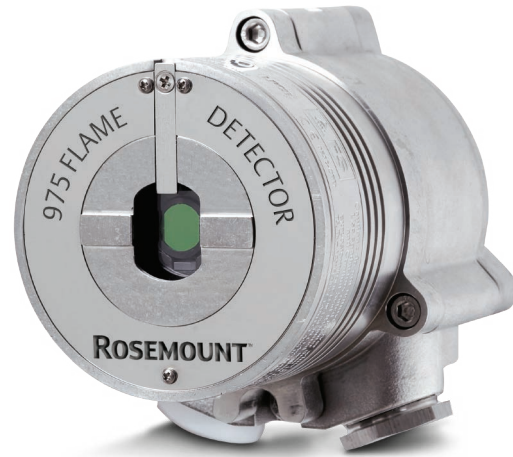

*Rosemount 975HR Multi-spectrum Infrared Hydrogen  
Flame Detector*

### Features & Benefits

- Multi spectrum design - for long distance detection of hydrocarbons and hydrogen flames
- High false alarm immunity
- Sensitivity selection - to ensure no zone crossover detection
- Automatic and manual built-in-test (BIT) - to assure continued reliable operation
- Heated window - for operation in harsh weather conditions (snow, ice, condensation)
- Multiple output options for maximum flexibility and compatibility
  - Relays (3) for alarm, fault and auxiliary
  - 0–20 mA (stepped)
  - HART® -protocol for maintenance and asset management
  - RS-485, Modbus compatible
- High reliability - MTBF - minimum 150,000 hours
- Approved to Safety Integrity Level 2 (SIL2 – TÜV)
- 5-Year Warranty
- User Programmable via HART or RS-485

### Applications

- Oil and gas - offshore and onshore process facilities
- Chemical plants
- Petrochemicals plants
- Storage tank farms
- Aircraft hangars
- Power generation facilities
- Pharmaceutical industry
- Automotive
- Explosives and ammunition
- Waste disposal facilities
- Hydrogen fuel cell industry

## Specifications

Table 1 - Rosemount 975HR Multi-spectrum Infrared Hydrogen Flame Detector

General specifications						
<b>Spectral response</b>	Multi IR bands					
<b>Detection range</b> (at highest sensitivity setting for 0.1 m <sup>2</sup> (1 ft <sup>2</sup> ) pan fire)	<b>Fuel</b>	<b>m / ft</b>	<b>Fuel</b>	<b>m / ft</b>	<b>Fuel</b>	<b>m / ft</b>
	n-Heptane	65 / 215	Ethanol	40 / 135	LPG*	45 / 150
	Gasoline	65 / 215	Methanol	35 / 115	Polypropylene pellets	35 / 115
	Diesel fuel	45 / 150	IPA (isopropyl alcohol)	40 / 135	Ammonia**	18 / 60
	JP5	45 / 150	Hydrogen*	38 / 125	Silane**	7 / 2
	Kerosene	45 / 150	Methane*	45 / 150	Office Paper	25 / 82
	*0.75 m (30 in.) high, 0.25 m (30 in.) width plume fire **0.5 m (25 in.) high, 0.2 m (8 in.) width plume fire					
<b>Response time</b>	Typically 5 s					
<b>Adjustable time delay</b>	Up to 30 s					
<b>Sensitivity ranges</b>	4 sensitive ranges for 0.1 m <sup>2</sup> (1 ft <sup>2</sup> ) n-heptane pan fire from 15 m (50 ft) to 65 m (215 ft)					
<b>Field of view</b>	Horizontal 67°, vertical 70° for gasoline Horizontal 80°, vertical 80° for hydrogen					
<b>Built-in-test (BIT)</b>	Automatic (and manual)					
<b>Temperature range</b>	Operating: -55 °C to +75 °C (-67 °F to +167 °F) Option: -55 °C to +85 °C (-67 °F to +185 °F) Storage: -55 °C to +85 °C (-67 °F to +185 °F)					
<b>Humidity</b>	Up to 95 % non-condensing (withstands up to 100 % relative humidity for short periods)					
<b>Heated optics</b>	To eliminate condensation and icing on the window					
Electrical specifications						
<b>Operating voltage</b>	24 Vdc nominal (18–32 Vdc)					
<b>Power consumption</b>	Standby: Max. 90 mA (110 mA with heated window) Alarm: Max. 130 mA (160 mA with heated window)					
<b>Cable entries</b>	2 x ¾ in. - 14 NPT conduits or 2 x M25 x 1.5 mm ISO					
<b>Wiring</b>	12–22 AWG (0.3 mm <sup>2</sup> –2.5 mm <sup>2</sup> )					
<b>Electrical input protection</b>	According to MIL-STD-1275B					
<b>Electromagnetic compatibility</b>	EMI/RFI protected to EN 61326-3 and EN 61000-6-3					
<b>Electrical interface</b>	The detector includes twelve (12) terminals with five (5) wiring options (factory set).					
Outputs						
<b>Relays</b>	Alarm, fault, and auxiliary SPST volt-free contacts rated 2 A at 30 Vdc					
<b>0–20 mA (stepped)</b>	Sink (source option) configuration Fault: 0 +1 mA                      Normal: 4 mA ±10 %                      Alarm: 20 mA ±5 % BIT fault: 2 mA ±10 %                      Warning: 16 mA ±5 %                      Resistance loop: 100–600 Ω					
<b>HART® Protocol</b>	Optional HART communications on the 0–20 mA analog current (FSK) - used for maintenance, configuration changes and asset management, available in mA source output wiring options					
<b>RS-485</b>	RS-485 Modbus compatible communication link that can be used in computer controlled installations					
Mechanical Specifications						
<b>Materials</b>	Stainless steel 316L with electro polish finish					
<b>Mounting</b>	Stainless steel 316L with electro polish finish					
<b>Dimensions</b>	Detector 101.5 x 117 x 157 mm (4 x 4.6 x 6.18 in.)					
<b>Weight</b>	Detector (stainless steel 316L) 2.8 kg (6.1 lb) Tilt mount 1.0 kg (2.2 lb)					
<b>Environmental standards</b>	Meets MIL-STD-810C for humidity, salt and fog, vibration, mechanical shock, high temp, low temp					
<b>Water and dust</b>	IP66 and IP67 per EN 60529, NEMA 250 6P					

Approvals	
<b>Hazardous Area</b>	<p><b>ATEX and IECEx</b> II 2 G D or Ex 2 G D                      Ex db eb op is IIC T4 Gb Ex db eb op is IIC T4 Gb                      Ex tb op is IIIC T96 °C Db Ex tb op is IIIC T96 °C Db                      (Ta -55°C to +85°C) Ta -55 °C to +75 °C</p> <p><b>FM/FMC/CSA</b> Class I Div. 1, Groups B, C, &amp; D                      Class II/III Div.1, Groups E, F &amp; G</p>
<b>Performance</b>	EN 54-10 (VdS) FM 3260
<b>Reliability</b>	IEC 61508 - SIL 2 (TÜV)
Accessories	
<b>Flame simulator kit</b>	00975-9000-0013
<b>Tilt mount</b>	00975-9000-0001
<b>Duct mount</b>	00975-9000-0002
<b>U-bolt/pole mount</b>	00975-9000-0007 (2 in. pole) 00975-9000-0008 (3 in. pole)
<b>USB RS485 harness kit</b>	00975-9000-0011
<b>Weather protector</b>	Plastic: 00975-9000-0003 Stainless steel: 00975-9000-0004
<b>Air shield</b>	00975-9000-0005
<b>Cone viewer kit</b>	00975-9000-0006




## Global Headquarters

### Emerson Automation Solutions

6021 Innovation Blvd.  
Shakopee, MN 55379, USA  
 +1 800 999 9307 or +1 952 906 8888  
 +1 952 949 7001  
 Safety.CSC@Emerson.com




## North America Regional Office

### Emerson Automation Solutions

8200 Market Blvd.  
Chanhassen, MN 55317, USA  
 +1 800 999 9307 or +1 952 906 8888  
 +1 952 949 7001  
 RFQ-NA.RCCRFQ@Emerson.com


## Latin America Regional Office

### Emerson Automation Solutions

1300 Concord Terrace, Suite 400  
Sunrise, FL 33323, USA  
 +1 954 846 5030  
 +1 952846 5121  
 RFQ.RMD-RCC@Emerson.com

## Europe Regional Office

### Emerson Automation Solutions Europe GmbH

Neuhofstrasse 19a P.O. Box 1046  
CH 6340 Baar  
Switzerland  
 +1 954 846 5030  
 +1 952846 5121  
 RFQ.RMD-RCC@Emerson.com




## Asia Pacific Regional Office

### Emerson Automation Solutions Asia Pacific Pte LTD


1 Pandan Crescent  
Singapore 128461  
 +65 6777 8211  
 +65 6777 0947  
 Enquiries@AP.Emerson.com

## Middle East and Africa Regional Office

### Emerson Automation Solutions

Emerson FZE P.O. Box 17033  
Jebel Ali Free Zone - South 2  
 +971 4 8118100  
 +971 4 88665465  
 RFQ.RMTMEA@Emerson.com


 [AnalyticExpert.com](http://AnalyticExpert.com)

 [Linkedin.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)

 [Twitter.com/Rosemount\\_News](https://twitter.com/Rosemount_News)

 [Facebook.com/Rosemount](https://www.facebook.com/Rosemount)

 [Youtube.com/user/RosemountMeasurement](https://www.youtube.com/user/RosemountMeasurement)

 [Google.com/+RosemountMeasurement](https://www.google.com/+RosemountMeasurement)

The Emerson logo is a trademark and service mark of Emerson Electric Co.  
Rosemount and Rosemount logotype are trademarks of Emerson.  
All other marks are the property of their respective owners.  
© 2018 Emerson. All rights reserved.